



WALL-MOUNTED SWIMMING POOL DEHUMIDIFIER

DRY 300i A 500i

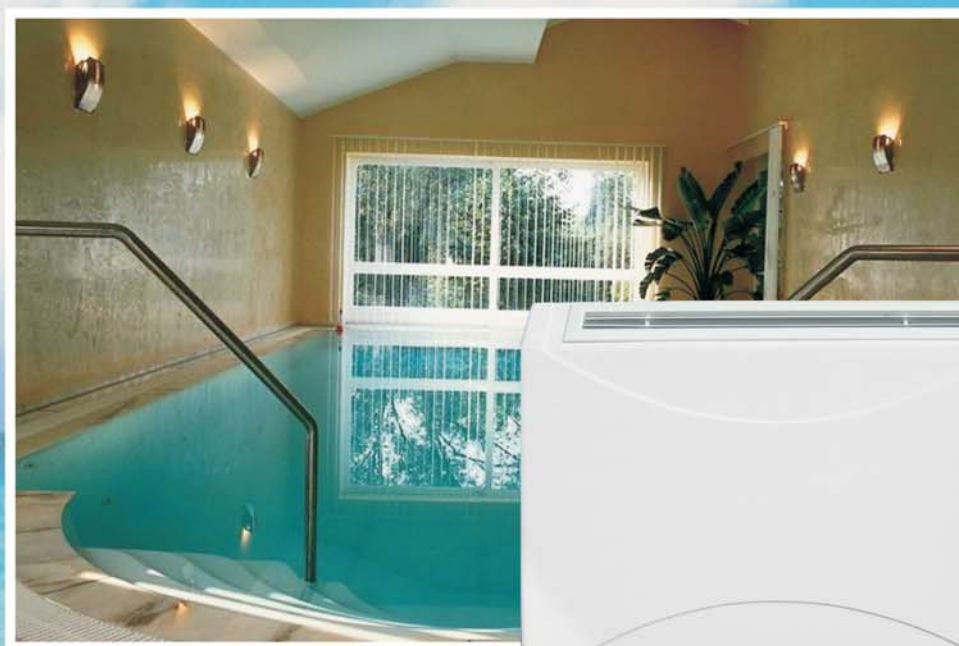

GUARANTEE 2 YEARS !

Accessories:



Wireless remote controls



Warmwater heater

Applications:



- ⇒ indoor swimming pools
- ⇒ spa rooms
- ⇒ saunas
- ⇒ laundry rooms
- ⇒ driers
- ⇒ warehouses etc.

Advantages:

- ⇒ remote control
- ⇒ low noise
- ⇒ low consumption
- ⇒ various colours




MICROWELL

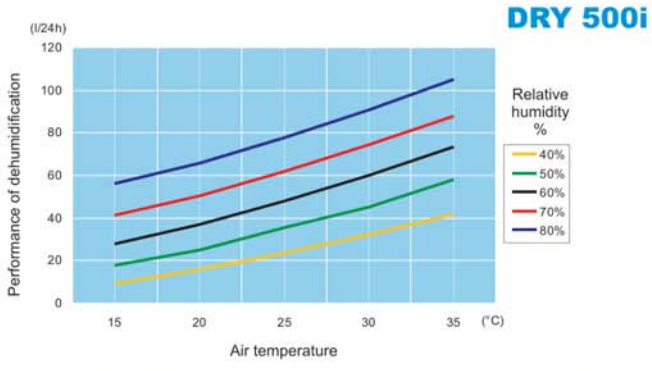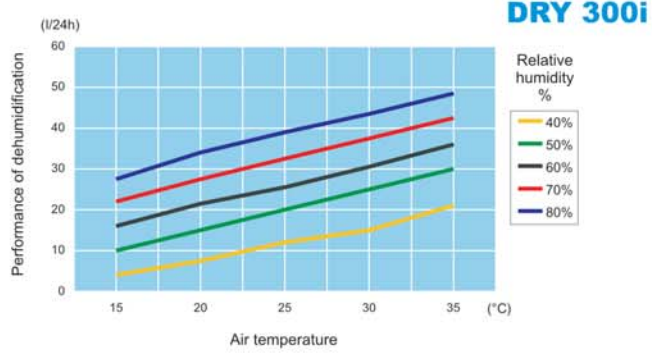


TECHNICAL INFORMATION

MODEL	UNITS	DRY 300i	DRY 500i
Suitable for pools up to	m ²	30	60
PERFORMANCE:			
30°C a 60% r.h.	l/24 h	30	60
30°C a 70% r.h.	l/24 h	38	75
30°C a 80% r.h.	l/24 h	43	92
Operating range - temperature	°C	15-35	15-35
Operating range - humidity	%	20-100	20-100
Air flow	m ³ /h	440	740
Noisines (in the distance of 1 m)	dB (A)	44	44
Total heat to air - dehumidifier	W	1900	3500
Power consumption	W	750	1200
Power supply	V/Hz/ø	230/50/1	230/50/1
Nominal running	A	4,4	7,5
Protection	A	10	16
Wire	mm ²	CYSY 3C x 1,5	CYSY 3C x 1,5
Condensate drain	ø mm	16	16
Dimension (l x h x w)	mm	780 x 653 x 255	1245 x 653 x 255
Package dimensions (l x h x w)	mm	850 x 810 x 345	1315 x 810 x 345
Weight - net weight / gross weight	kg	40/46	60/69
ACCESSORIES			
Remote control - wireless - with rotary wheel	yes/no	yes	yes
Remote control - wireless - with display	yes/no	yes	yes
Total heat to air - warmwater heater (on boiler water 90/70°C)	W	2000	4000
- total head to air - dehumidifier and warmwater heater	W	2900	5500

Connections

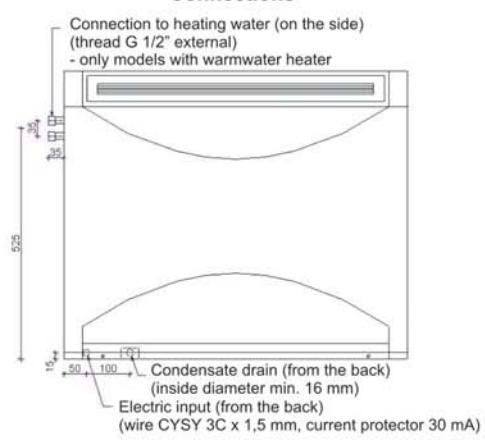

Air Flow diagram

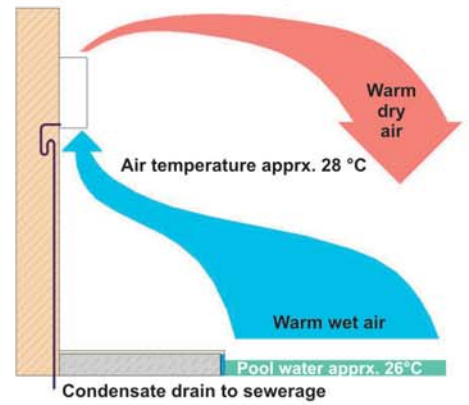

Producer:

MICROWELL Ltd.
 SNP 2018/42, 927 01 Šaľa, Slovakia
 Phone: 031/ 7020 540, 7020 541
 Fax: 031/7020 542
 E-mail: microwell@microwell.sk
www.microwell.sk

Distributor: